


MULTIKLER

INDUSTRIAL MAINTENANCE
Solvents, paints, lacquer and varnish

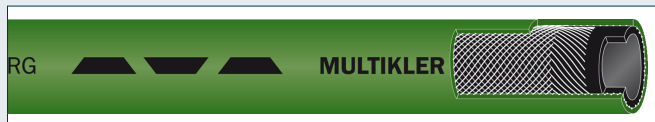

Applications

Pressure service line for benzene, toluene, and xylene based paints, lacquer, varnish, and certain chemicals.
Also for industrial paint spray equipment.

Advantages

- n Hose cover resistant both to abrasion and to corrosive chemicals.
- n Free from silicone.
- n Antistatic tube.

Technical description

Inner tube: solvent paints resistant NBR, black, smooth.
Reinforcement: synthetic textile.
Cover: oil and weather resistant NBR/PVC, green, smooth.
Temperature range: - 20 °C to + 100 °C.
Electrical properties: antistatic tube, $R < 10^6 /m$.

Couplings/Fittings

Special paint hose couplings are recommended.

MULTIKLER

17/10/2012

ID mm	Wall thickness mm	OD mm	Working pressure bar	Bursting pressure bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m		
6	± 0.4	3.30	12.6	± 0.5	20.0	60	60	0.14	40	0064197	2680
									80	0064198	2640
									120	0064199	2640
8	± 0.5	3.50	15.0	± 0.6	20.0	60	70	0.17	20	0064201	□
									40	0064202	n
									80	0064203	2640
									120	0064204	n
10	± 0.5	3.75	17.5	± 0.6	20.0	60	90	0.24	20	0064207	n
									40	0064208	n
									80	0064209	2240
									120	0064210	2280
13	± 0.6	4.00	21.0	± 0.7	20.0	60	110	0.28	20	0064211	□
									40	0064212	n
									80	0064213	1520
									120	0064214	1440
16	± 0.7	4.50	25.0	± 0.8	20.0	60	130	0.38	20	0064215	□
									40	0064216	n
									80	0064217	1360
									120	0064218	1320

□ Upon availability.

Branding



Trelleborg Industrie SAS - ZI La Combaude - Rue de Chantemerle - 63050 Clermont-Ferrand Cedex 2 - France
www.trelleborg.com/industrialhose